
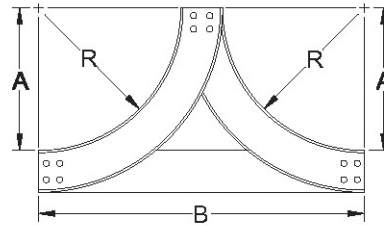


# VERTICAL TEE

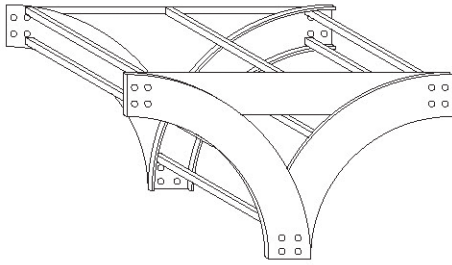

To complete catalogue number insert the appropriate prefixes (2) in place of asterisks.

<b>V</b>	<b>T</b>	<b>A</b>	—	<b>*</b>	<b>9</b>	<b>6</b>	<b>**</b>
↓	↓	↓		↓	↓	↓	↓
<b>BASIC PART</b>		<b>MATERIAL FINISH</b>		<b>SIDERAIL HEIGHT</b>	<b>RADIUS</b>	<b>WIDTH</b>	<b>RUNG SPACING</b>
VT - Vertical Tee		A - Aluminum		1 - C / 90mm (3.5") 2 - C / 152mm (6.0") 4 - D / 114mm (4.5") 5 - D / 152mm (6.0") 7 - E / 114mm (4.5") 8 - E / 152mm (6.0") H - E / 160mm (6.3") 9 - E / 203mm (8.0")	3 - 305mm (12") 6 - 610mm (24") 9 - 915mm (36") * - 1220mm (48")	2 - 150mm (6")† 3 - 203mm (8") 5 - 300mm (12") 6 - 450mm (18") 7 - 600mm (24") 8 - 750mm (30") 9 - 900mm (36")	1 - Solid 2 - Ventilated 4 - Ladder

† - Not available in 9 series.

BEND RADIUS		TRAY WIDTH		CATALOGUE #	DIMENSIONS mm (in)		
R		W			A	B	BASED ON SIDERAIL HEIGHT (S/R) HEIGHT
mm	(in)	mm	(in)	* SIDERAIL HEIGHT ** RUNG SPACING	mm	(in)	
305mm	(12")	150	(6)	VTA-(*)32(**)	305mm	(12")	IF S/R 90 THEN B = 700mm (27.6") IF S/R 114 THEN B = 724mm (28.5") IF S/R 152 THEN B = 762mm (30.0") IF S/R 160 THEN B = 770mm (30.3") IF S/R 203 THEN B = 813mm (32.0")
		203	(8)	VTA-(*)33(**)			
		300	(12)	VTA-(*)35(**)			
		450	(18)	VTA-(*)36(**)			
		600	(24)	VTA-(*)37(**)			
		750	(30)	VTA-(*)38(**)			
		900	(36)	VTA-(*)39(**)			
610mm	(24")	150	(6)	VTA-(*)62(**)	610mm	(24")	IF S/R 90 THEN B = 1310mm (51.6") IF S/R 114 THEN B = 1334mm (52.5") IF S/R 152 THEN B = 1372mm (54.0") IF S/R 160 THEN B = 1380mm (54.3") IF S/R 203 THEN B = 1432mm (56.0")
		203	(8)	VTA-(*)63(**)			
		300	(12)	VTA-(*)65(**)			
		450	(18)	VTA-(*)66(**)			
		600	(24)	VTA-(*)67(**)			
		750	(30)	VTA-(*)68(**)			
		900	(36)	VTA-(*)69(**)			
915mm	(36")	150	(6)	VTA-(*)92(**)	915mm	(36")	IF S/R 90 THEN B = 1920mm (75.6") IF S/R 114 THEN B = 1944mm (76.5") IF S/R 152 THEN B = 1982mm (78.0") IF S/R 160 THEN B = 1990mm (78.3") IF S/R 203 THEN B = 2033mm (80.0")
		203	(8)	VTA-(*)93(**)			
		300	(12)	VTA-(*)95(**)			
		450	(18)	VTA-(*)96(**)			
		600	(24)	VTA-(*)97(**)			
		750	(30)	VTA-(*)98(**)			
		900	(36)	VTA-(*)99(**)			
1220mm	(48")	150	(6)	VTA-(*)2(**)	1220mm	(48")	IF S/R 90 THEN B = 2530mm (99.6") IF S/R 114 THEN B = 2554mm (100.6") IF S/R 152 THEN B = 2592mm (102.0") IF S/R 160 THEN B = 2600mm (102.4") IF S/R 203 THEN B = 2643mm (104.1")
		203	(8)	VTA-(*)3(**)			
		300	(12)	VTA-(*)5(**)			
		450	(18)	VTA-(*)6(**)			
		600	(24)	VTA-(*)7(**)			
		750	(30)	VTA-(*)8(**)			
		900	(36)	VTA-(*)9(**)			